


TFT Monitor for the
WINCOR NIXDORF ProCash series 15“

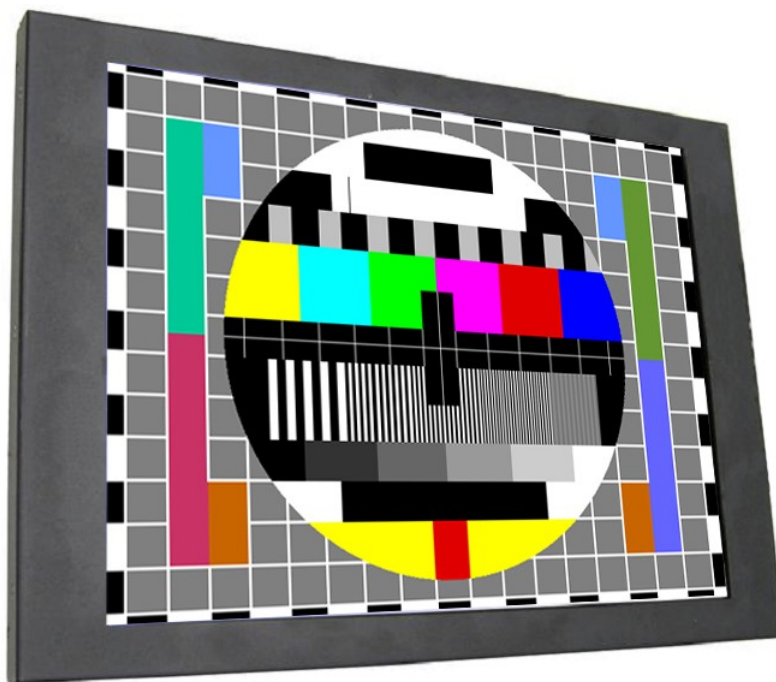

General :

This monitor is at present available in standard version.

Available for following units:

- ProCash 2000 / 2000xe + 2050 / 2050xe
- ProCash 2100 / 2100xe + 2150 / 2150xe
- ProCash 3000 + 3100 / 3100xe
- ProCash 4000

Technical Data	TFT - 15 inch
Display:	Standard
Display size	15"
Brightness	400 cd/m ²
Resolution timings	1024x768 dots annualized VGA / SVGA / XGA
Input Signal:	
Videonorm	VGA, DVI, PanelLink
H. Frequency	31 - 35 kHz
V. Frequency	50 - 75 Hz
Sync. signal	H / V separated, TTL level
Pixelclock	max. 85 MHz
Colours	6 bit per colours
Adjustments (OSD):	Brightness, Contrast, Horizontal position, Vertical Position, Default; Settings saved automatically
Power Management:	Background lighting is switched off by missing video signal.
Connections:	
Input signal	15 pol. SUB-D high density DVI, PanelLink MDR40 (depending from the origin monitor)
Power supply	12V DC
Power consumption	approx. 48 W
Operation conditions:	Operating temperature 0° - 50°C
MTBF:	Background lighting 50.000 hours / 25°C
Weight:	3,0 Kg (6.5 lbs)
Manufactured acc. to:	EMV: EN55022, EN55024, EN61000; CE: EN60950 conform
Scope of delivery:	Monitor chassis
Optional:	Privacy filter for standard version
Versions:	1750041566 1750060091 1750064254 1750066035 1750084538 1750107721 1750108074